

# FlexWrapp Coating Gun Series

## Adjustable Coating Lengths up to 1000 mm

### Designed for ultimate precision

**MELTON** FlexWrapp Coating Gun Series is designed for continuous applications that require frequent width changes with maximum precision to reduce adhesive usage. The FlexWrapp Laminating Series offers improved reliability and has been specifically engineered to meet the demanding needs of the woodworking environment.

#### **MELTON** 's FlexWrapp Series :

- Designed to ensure a consistent and smooth application for exact adhesive-film coating.
- Easy coating width adjustment up to 1000 mm.
- RTD sensing and proportional temperature control for an error margin up to 0.5°C (1°F).
- Optional Teflon® coating to prevent build-up for an easy-to-clean surface.
- Maximum durability for minimized labor and maintenance costs.




Easy to use width regulation system, bilateral, independent, and with just one operational side.



Optional filter.

Small, light and manipulable.

Suitable for work with special adhesives.

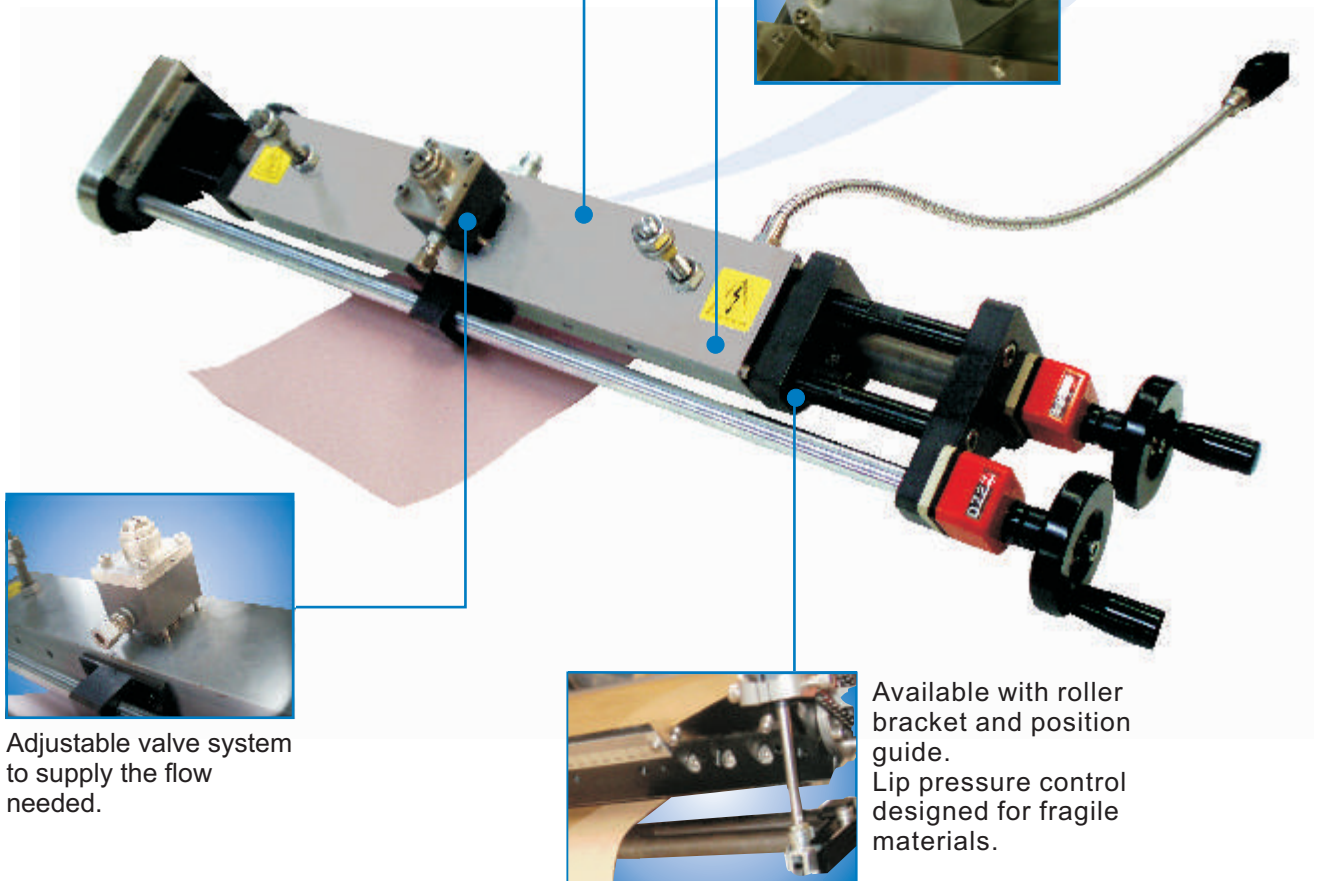

Adjustable valve system to supply the flow needed.



Available with roller bracket and position guide. Lip pressure control designed for fragile materials.

# FlexWrapp Coating Gun Series



InduTech Int. nv/sa ☎ +32 (0)3 464 13 02  
 Melkerijweg 5 ☎ +32 (0)3 464 13 04  
 B-2240 Zandhoven ☎ info@indutech.be  
 Belgium ☎ www.indutech.be



The **MELTON** FlexWrapp Series is ideal for wood profile applications, paper converting and profile wrapping. Precise adjustments allow for a superior quality application with excellent results.

## **M** A TOTAL PACKAGE

**MELTON**® offers a complete selection of hot melt components and support equipment:

- RTD hot melt hoses**
- Manual and automatic dispensing valves**
- Nozzle and applicator styles**
- Mounting bracket packages**
- Solid-state pattern control systems**
- In-line filters**
- Compatible replacement parts**
- High-performance hot melt adhesives**
- Cost-effective rebuild/exchange programs**

## Technical Specifications

<b>FlexWrapp Characteristics</b>	
<b>Maximum Coating Length</b>	Up to 1000 mm
<b>Temperature Control</b>	PT - 100/ NI - 120/ FEKO
<b>Coating Thickness Range</b>	0.025mm - 1mm
<b>Maximum Operating Temperature</b>	230°C/446°F
<b>Maximum Operating Pressure</b>	100 bar
<b>Operating Speed</b>	150 m/min
<b>Dimensions</b>	180 mm x 150 mm x (depending on the configuration)



InduTech Int. nv/sa ☎ +32 (0)3 464 13 02  
 Melkerijweg 5 ☎ +32 (0)3 464 13 04  
 B-2240 Zandhoven ☎ info@indutech.be  
 Belgium ☎ www.indutech.be

